



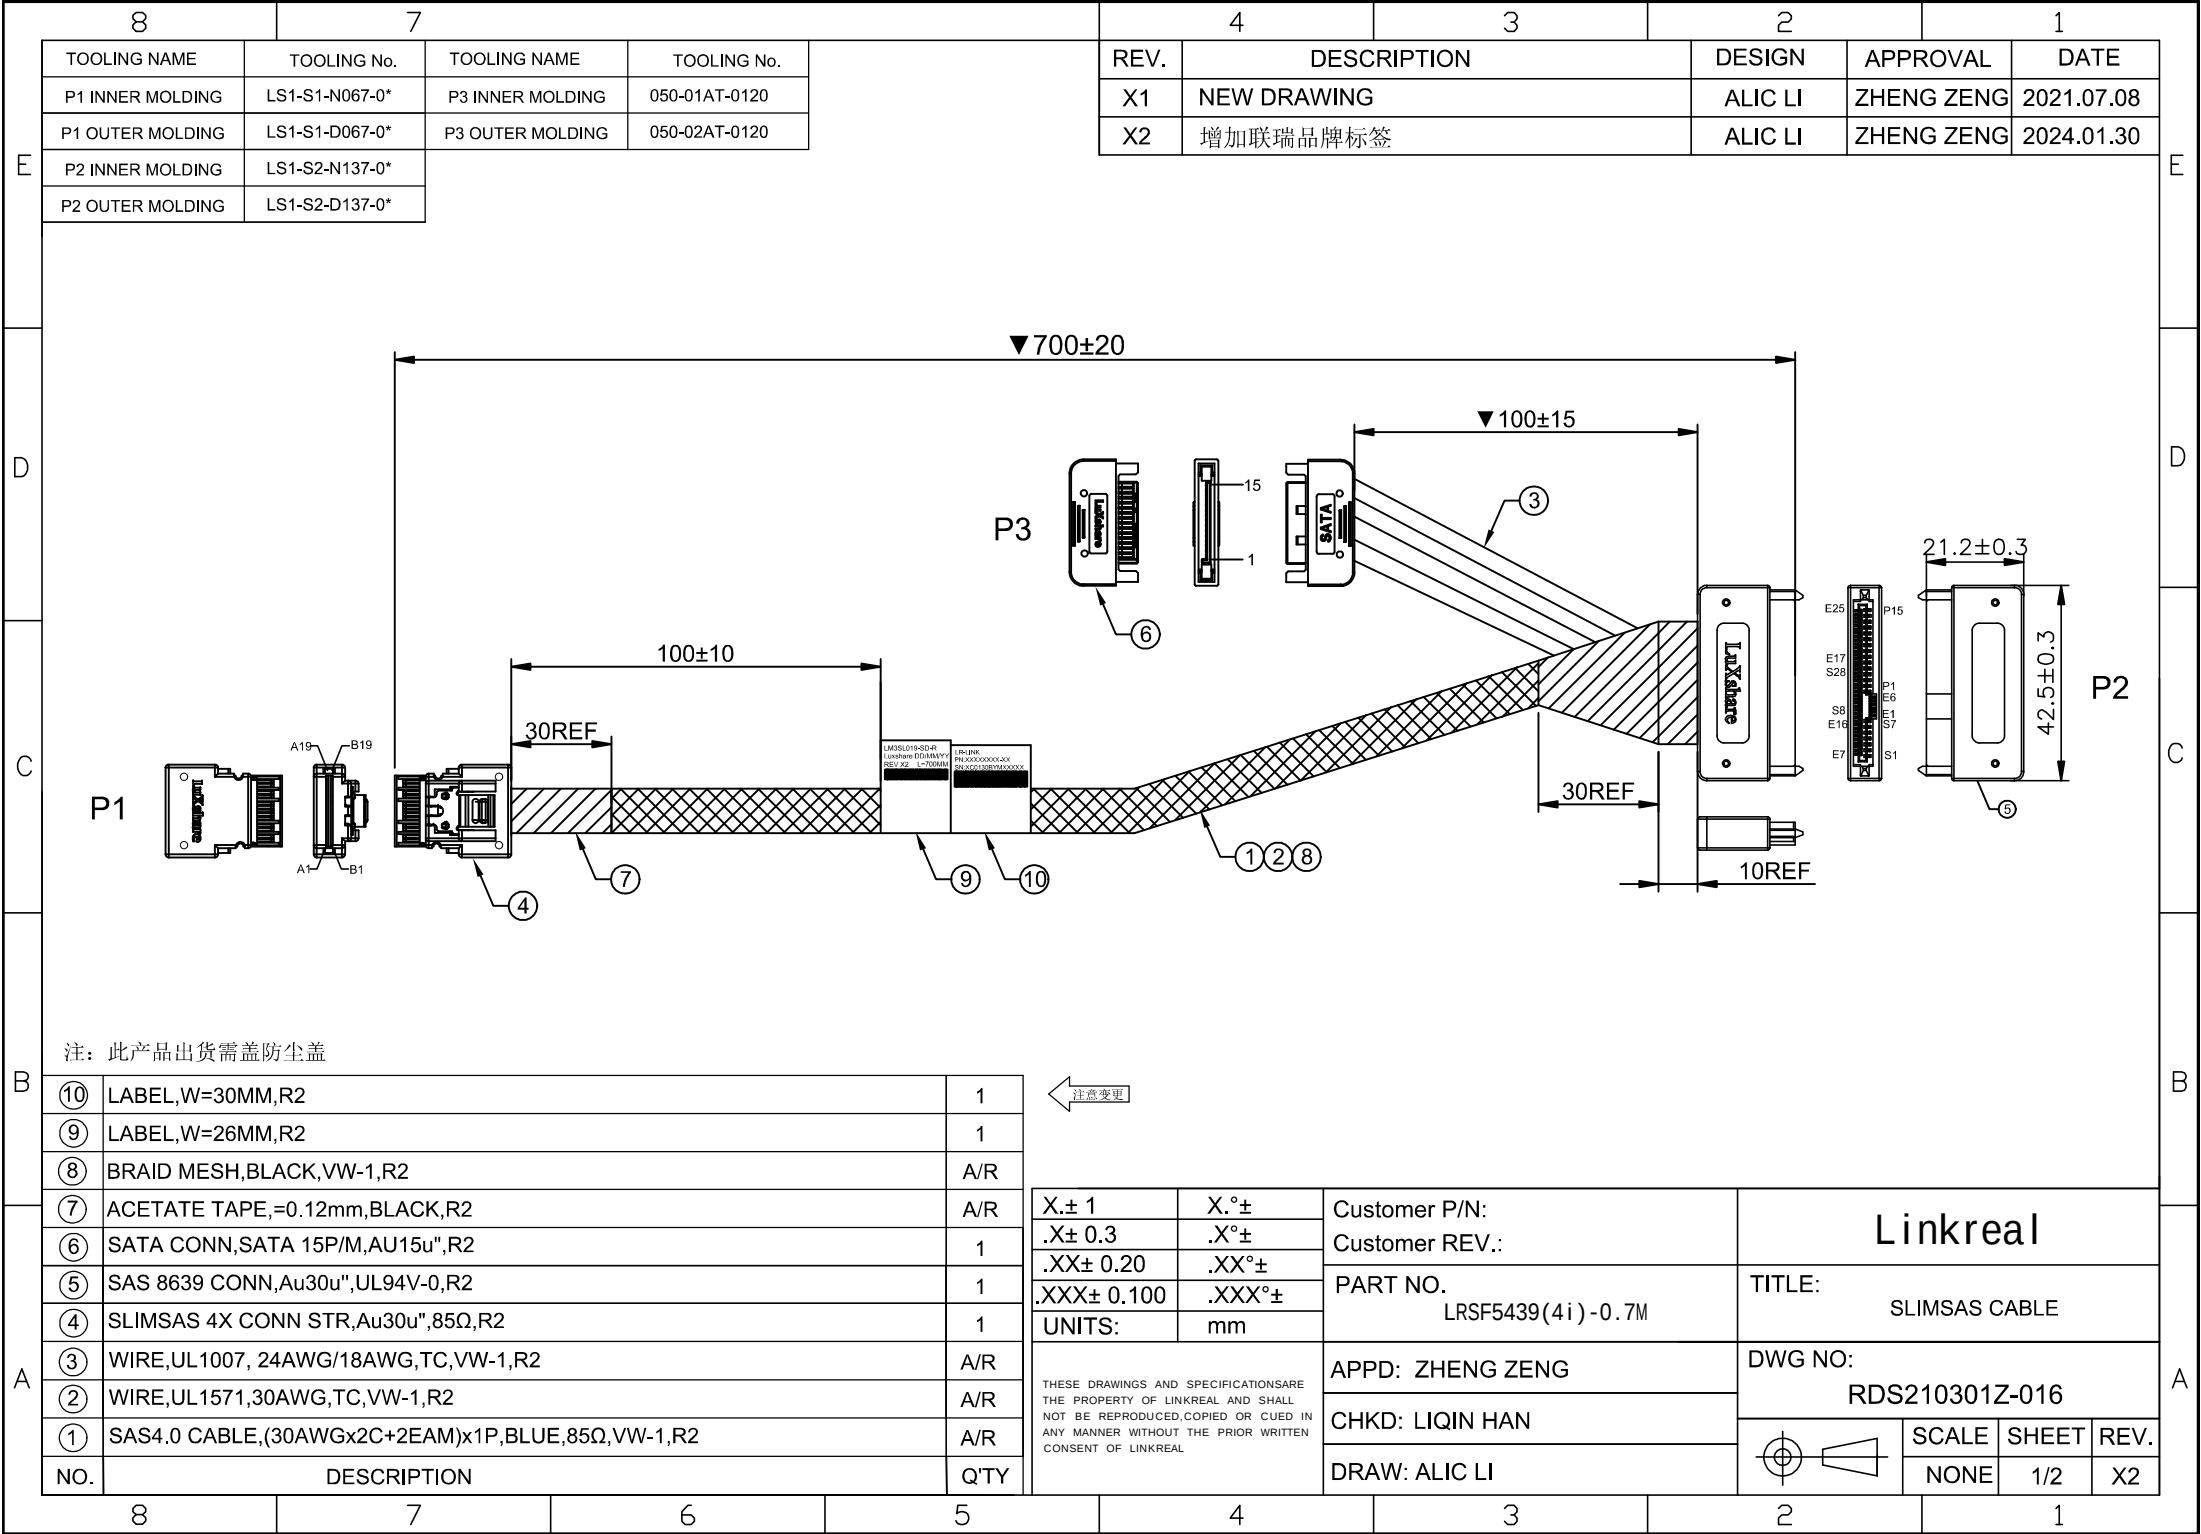

WIRE CONNECTION TABLE

P1		P2	
GROUND	A1	E15	GND
PERp0	A2	E14	RX_DP0
PERn0	A3	E13	RX_DN0
GROUND	A4	E12/S22	GND
PERp1	A5	S21	RX_DP1
PERn1	A6	S20	RX_DN1
GROUND	A7	S19	GND
BP_TYPEA(VSPA)<SB7>	A8	E3	VCC3_AUX
CWAKEA#,QBFFA<SB3>	A9	P1	WAKE#
GROUND	A10	E9	GND
VSPA+	A11	E7	CLK_DP0
VSPA-	A12	E8	CLK_DN0
GROUND	A13	S28	GND
PERp2	A14	S27	RX_DP2
PERn2	A15	S26	RX_DN2
GROUND	A16	S25/E22	GND
PERp3	A17	E21	RX_DP3
PERn3	A18	E20	RX_DN3
GROUND	A19	E19	GND
GROUND	B1	E9	GND
PETp0	B2	E10	TX_DP0
PETn0	B3	E11	TX_DN0
GROUND	B4	E12/S16	GND
PETp1	B5	S17	TX_DP1
PETn1	B6	S18	TX_DN1
GROUND	B7	S19	GND
2W CLOCKA<SB0>	B8	E23	Clock0
2W DATAA<SB1>	B9	E24	DATA0
GROUND	B10	E22	GND
PERSTA#<SB2>	B11	E5	PERSTA#
CPRSTA#<SB6>	B12	P4	IF_DET_NA
GROUND	B13	S22	GND
PETp2	B14	S23	TX_DP2
PETn2	B15	S24	TX_DN2
GROUND	B16	S25	GND
PETp3	B17	E17	TX_DP3
PETn3	B18	E18	TX_DN3
GROUND	B19	E19	GND




主标签打印参考SAP"联瑞主标签打印模板"
(文档编号1963004015)

- NOTES(说明):
- 1.100% OPEN,SHORT & INTERMITANCE TEST.
(产品必须100%进行断路、短路及间歇性接触测试)
 - 2.HARMFUL MATERIAL AND PROCESS CONTROL ,
PLEASE FOLLOW DOC. NO.QW-Q-043.
(本产品使用原物料及制程必须符合QW-Q-043环境管理物质相关规定)
 - 3.CONDUCTOR RESISTANCE:3 Ohms Max.
(导通阻抗:3 Ohms Max.)
 - 4.INSULATION RESISTANCE:10M Ohms/300V DC,10ms/Min.
(绝缘阻抗: 10M Ohms/300V DC,10ms/Min)
 - 5.HIGH FREQUENCY CHARACTERISTIC PLEASE FOLLOW PCIE 4.0
STANDARD.(NEED TEST)
(高频特性:符合 PCIE 4.0规范要求)
 - 6.DIFFERENTIAL IMPENDANCE FOR CABLE :85±10ohm;DIFFERENTIAL
IMPENDANCE FOR CONN :85±15ohm;
(成品阻抗: 线材: 85±10 ohm, 含连接器: 85±15 ohm)
 - 7.THE DIMENSIONS MARKED"▼"SHALL BE CHECKED;
(标注"▼"的尺寸必须重点检验)
 - 8.制程工艺参考规范: 文件编号1972000010

注: 所有GND导通, 地线可就近焊接

8639所有短路点:
S1、S4、S7、P5、P6、P12、E9、E12、E15、S8、S11、
S14、S16、S19、S22、S25、S28、E19、E22

P3	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
P2				P5,P6		P7.P8.P9		P12		P13.P14.P15					
PIN DEFINITION				GND		5V		GND		12V					
WIRE AWG				18AWG		18AWG		24AWG		18AWG					
WIRE COLOR				BLACK		RED		BLACK		YELLOW					

X.± 1	X.°±	Customer P/N:	Linkreal				
.X± 0.3	.X°±	Customer REV.:					
.XX± 0.20	.XX°±	PART NO. LRSF5439(4i)-0.7M	TITLE: SLIMSAS CABLE				
.XXX± 0.100	.XXX°±						
UNITS:	mm						
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LINKREAL AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LINKREAL		APPD: ZHENG ZENG		DWG NO: RDS210301Z-016			
		CHKD: LIQIN HAN					
		DRAW: ALIC LI			SCALE	SHEET	REV.
					NONE	2/2	X2