


P1			P2		
GND	B19		GND	A19	
RX3-	B18		RX3-	A18	
RX3+	B17		RX3+	A17	
GND	B16		GND	A16	
RX2-	B15		RX2-	A15	
RX2+	B14		RX2+	A14	
GND	B13		GND	A13	
SB-	B12		SB-	A12	
SB+	B11		SB+	A11	
GND	B10		GND	A10	
SB-	B9		SB-	A9	
SB+	B8		SB+	A8	
GND	B7		GND	A7	
RX1-	B6		RX1-	A6	
RX1+	B5		RX1+	A5	
GND	B4		GND	A4	
RX0-	B3		RX0-	A3	
RX0+	B2		RX0+	A2	
GND	B1		GND	A1	
GND	A19		GND	B19	
TX3-	A18		TX3-	B18	
TX3+	A17		TX3+	B17	
GND	A16		GND	B16	
TX2-	A15		TX2-	B15	
TX2+	A14		TX2+	B14	
GND	A13		GND	B13	
SB-	A12		SB-	B12	
SB+	A11		SB+	B11	
GND	A10		GND	B10	
SB-	A9		SB-	B9	
SB+	A8		SB+	B8	
GND	A7		GND	B7	
TX1-	A6		TX1-	B6	
TX1+	A5		TX1+	B5	
GND	A4		GND	B4	
TX0-	A3		TX0-	B3	
TX0+	A2		TX0+	B2	
GND	A1		GND	B1	

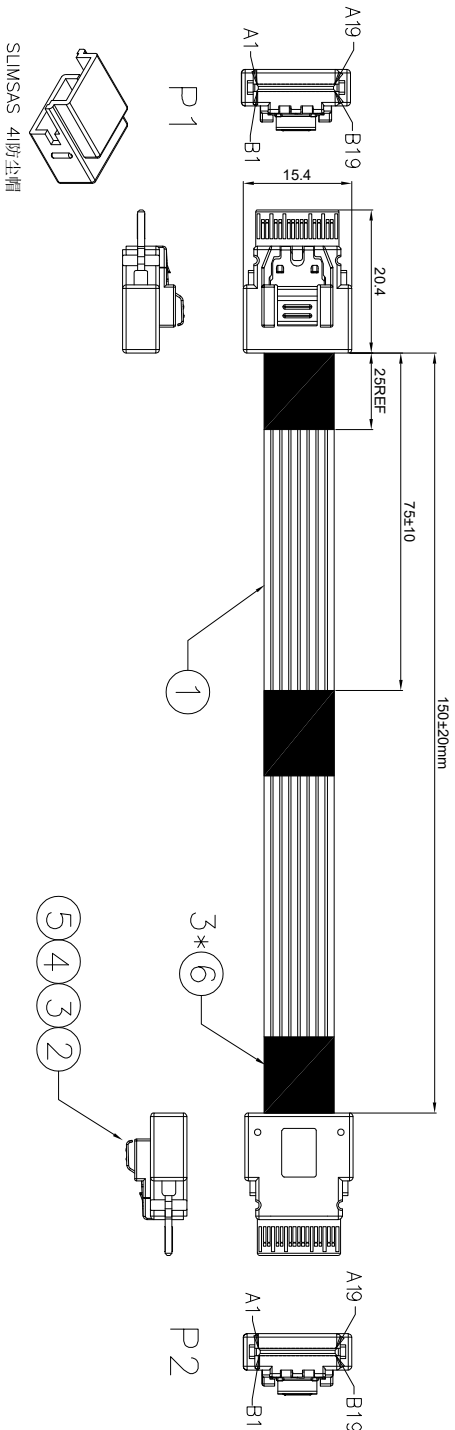

- . ELECTRICAL CHARACTER:
- a. 100% OPEN&SHORT TESTING;
 - b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
 - c. INSULATION RESISTANCE:10M Ohm(Min);
 - d. CONDUCTIVE RESISTANCE:2 Ohm(Max).

6	醋酸胶布	醋酸胶布,W=25±5mm,黑色	A/R	M		
5	成型料	黑色PBT-RG30+30%GF	A/R	g		
4	成型料	PE料透明	A/R	g		
3	PCB	SLIMSAS 8654 4i PCB, FR4, 88±8 ohm	2	PCS		
2	弹片	slimsas 弹片, SUS	2	PCS		
1	线材	SAS CABLE :32AWGx2C+2D+AL.Mylay+Amylay, 85±10 ohm	A/R	M		
NO.	名称	描述	QTY	UNITS		
TOLERANCE		LR-LINK				
INCHES						
M/M						
.X	.015	.30				
.XX	.010	.10				
.XXX	.005	.05				
DRAWN BY	TONY CHAN	SCALE	NONE		REV	A0
		UNIT	MM			
CHECK BY	TONY CHAN	SHEET	1/1	COSTOMER:		
APPD BY	LuF	DATE	25/02/21	DWG NO.:	AQ1607-0214A	
		TITLE: SLIMSAS 8654 4i TO 8654 4i				
CUSTOMER. P/N: 联瑞		P/N: LRSF5454(4i)-0.15M				